



Wired


camira

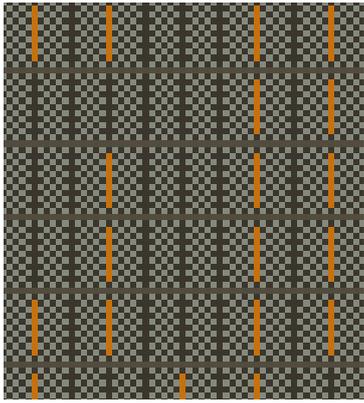

Q754: EFZC44

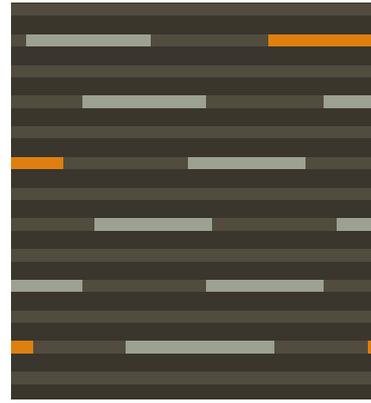


Q754: EGBC44

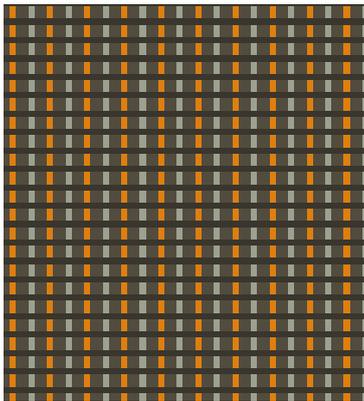


Q754: EGAC44




Q754: EGFC42

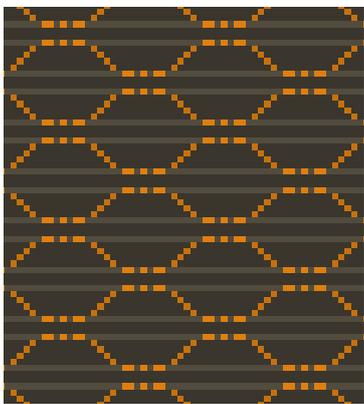


Q754: EGCC44

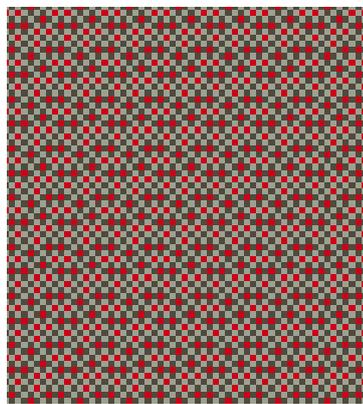

Q1001: EGGC42

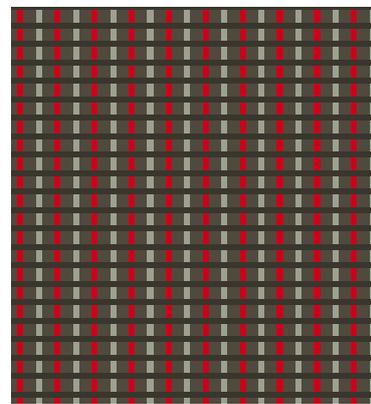

Q754: EGAC42

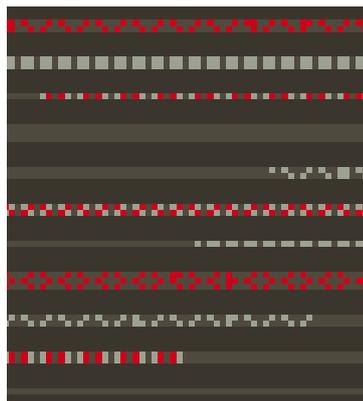


Q754: EGDC42




Q754: EGHC42

Photographic fabric scans are not colour accurate. Request a physical pattern card before ordering.


All scans at 50% scale

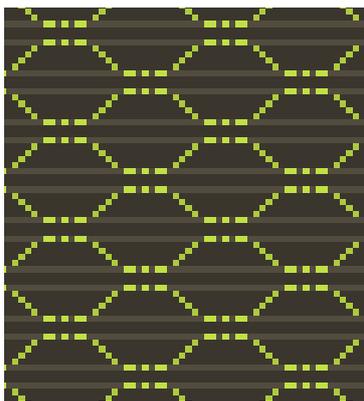


Q754: EGCC45

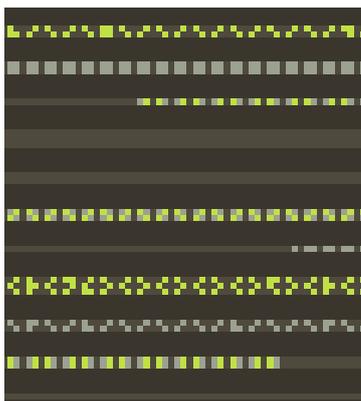


Q754: EGDC45

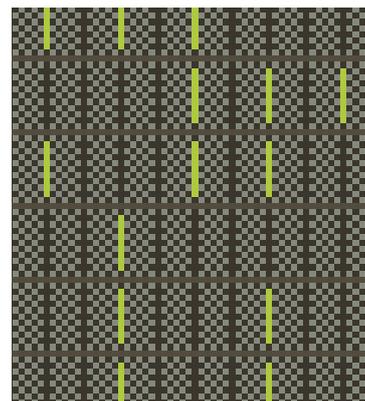


Q754: EFZC45

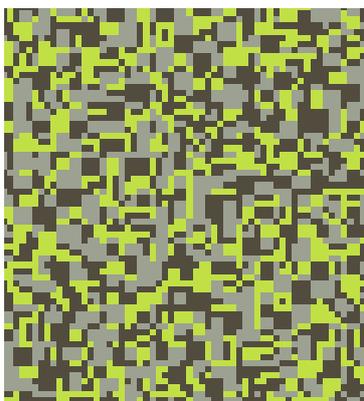


Q1001: EGSC45

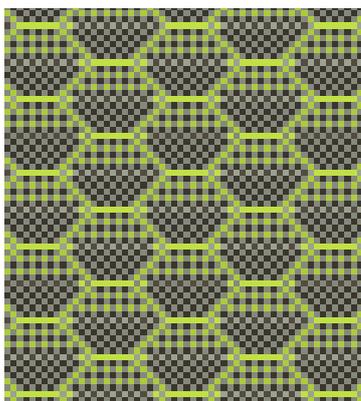


Q754: EGFC45

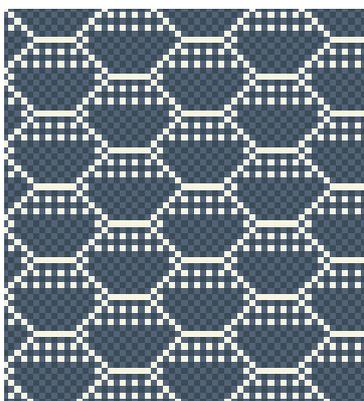

Q1001: EGNC47

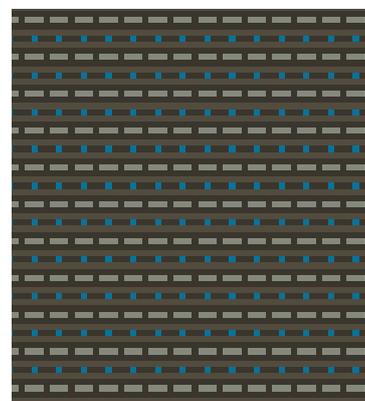


Q754: EGEC46

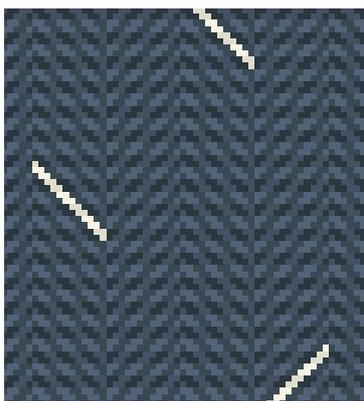

Q754: EGOC47




Q754: EGMC47

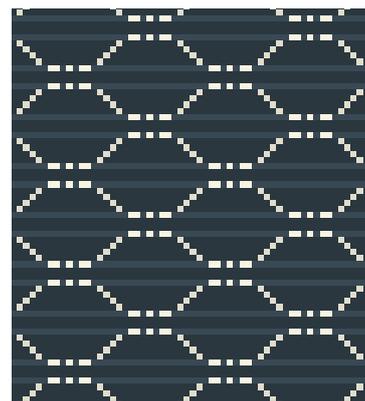


Q754: EGCC47

All colourways in this range are available on a 6 - 8 week lead time with a MOQ of 300m.


Please note bespoke patterns and constructions are available.

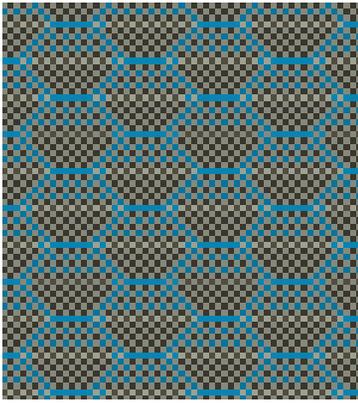

Q754: EGFC46

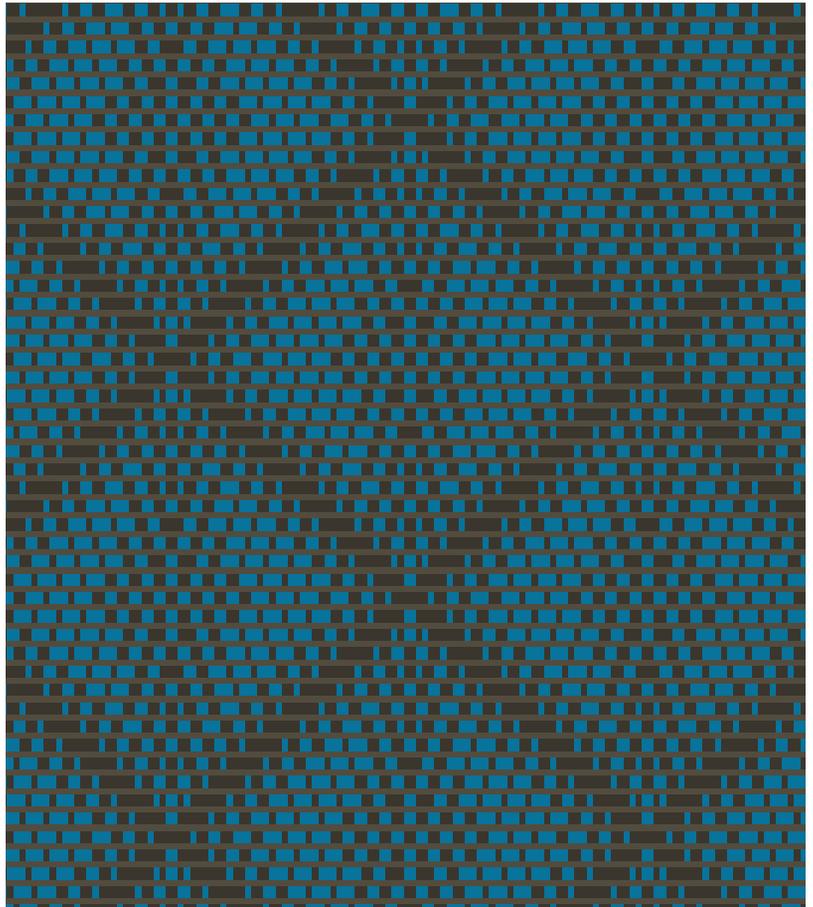

Q754: EGIC46

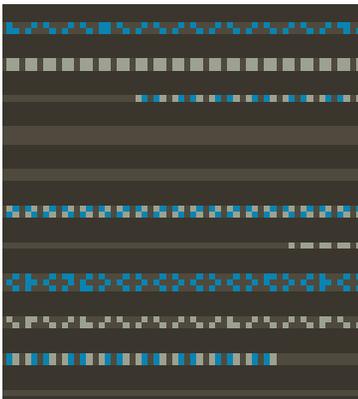


Q754: EGDC46



Q754: EGKC43



Q754: EGJC43

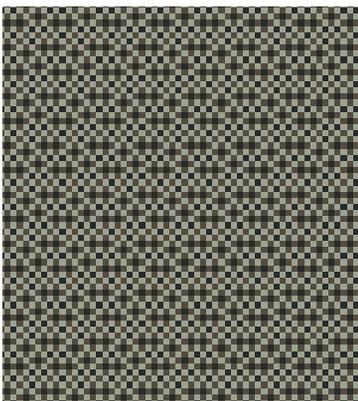

Q1001: EGGC43



Q754: EGLC43

Transport
seating

Year guarantee

Wired is an intricately detailed fabric collection which subtly moves from one surface texture to another through a carefully constructed mix of pile heights and handles. Some areas of the fabric surface are presented as all cut moquette and others in all loop to create a complex textural transport upholstery which combines both unique aesthetics and high performance.

The collection is designed around small scale textures and patterns with highlight accent colours of muted blues, greens, subdued orange and vivid red set against darker grey grounds. The design effects span illusory, graduated and delicate dappling to set a tone of poise and refinement.

Technical information

UK

Composition

Pile: 85% Wool, 15% Nylon
Ground: 100% Cotton

Width

150 cm minimum

Weight

860 g/m² ±5% (1290 g/lin.m ±5%)

Thickness

4.2 ±0.3 mm (BS 4051)

Abrasion Resistance

≥80,000 Martindale cycles (BS EN ISO 14465)

Flammability*

Tailored to meet international bus, coach and rail standards. For specific compliance and certification please contact your Camira representative.

Light Fastness

6 (EN ISO 105 B02)

Fastness to Rubbing

Wet: 4, Dry: 4 (ISO 105 X12)

Maintenance

Vacuum regularly. Wipe clean with a damp cloth or shampoo using proprietary upholstery shampoo.

* Flammability performance is dependent on components used. FR post-treatments may be required to meet specific standards. Further information can be provided on request. Post treatments may change the technical performance and appearance of a product.

Batch to batch variations in shade may occur within commercial tolerances. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

D

Zusammensetzung

Oberfläche: 85% Wolle, 15% Nylon
Trägergewebe: 100% Baumwolle

Breite

150 cm nutzbare Breite

Gewicht

860 g/m² ±5% (1290 g/lfd.m ±5%)

Dicke

4.2 ±0.3 mm (BS 4051)

Scheuerfestigkeit

≥80,000 Martindale Scheuertouren (BS EN ISO 14465)

Feuersicherung*

Zugeschnitten auf internationale Standards für Busse, Reisebusse und Bahnen. Für spezifische Anforderungen und Zertifizierung wenden Sie sich bitte an Ihren Ansprechpartner bei Camira.

Lichtechtheit

6 (EN ISO 105 B02)

Reibechtheit

Wet: 4, Dry: 4 (ISO 105 X12)

Reinigung

Regelmässig staubsaugen. Dazu mit einem feuchten Tuch abwischen, oder mit einem speziellen Polsterschaum behandeln.

* Die Entflammbarkeit ist von den verwendeten Komponenten abhängig. Flammhemmende Nachbehandlungen können erforderlich sein, um bestimmte Standards zu erfüllen. Weitere Informationen werden auf Anfrage zur Verfügung gestellt. Stoffbehandlungen können die technischen Eigenschaften und das Aussehen des Stoffes beeinflussen.

Handelsübliche Farbabweichungen vorbehalten. Die registrierten und nicht registrierten Urheberrechte der Dessinierungen sind ausschliessliches Eigentum der Camira Fabrics Limited.

F

Composition

Surface: 85% Laine, 15% Nylon
Couche Inférieure: 100% Coton

Largeur

150 cm minimum

Poids

860 g/m² ±5% (1290 g/m.l ±5%)

Epaisseur

4.2 ±0.3 mm (BS 4051)

Résistance à l'abrasion

≥80,000 Martindale tours (BS EN ISO 14465)

Flammabilité*

Conçus pour répondre aux normes internationales d'autobus, d'autocars et chemin de fer. Pour des certifications ou conformités spécifiques, veuillez contacter votre représentant Camira.

Solidité à la lumière

6 (EN ISO 105 B02)

Solidité au Frottement

Wet: 4, Dry: 4 (ISO 105 X12)

Nettoyage

Aspirer régulièrement. Essuyer avec une étoffe humide ou nettoyer à l'aide d'un produit approprié pour tissus d'ameublement.

*La performance d'inflammabilité dépend des composantes utilisées. Les traitements postérieurs FR peuvent être nécessaires pour respecter des normes spécifiques. Plus amples renseignements peuvent être fournis sur demande. Les traitements supplémentaires post-production peuvent altérer les performances techniques et l'apparence d'un produit.

Variations de coloris d'un bain à un autre peuvent se manifester. Les Droits de Conception non-enregistrés et les droits d'auteur de tous les motifs sont la propriété exclusive de Camira Fabrics Limited.