

LANCASHIRE TESTING SERVICES LIMITED

Lyon Road Industrial Estate : Kearsley : Bolton Lancashire : BL4 8NB Tel: +44 (0) 1204 792858 Email: enquiries@ltslab.co.uk www.ltslab.co.uk



TEST CERTIFICATE

CLIENT:	Camira Fabrics	Certificate Number:	UK2000935 -4
	Meltham Mills, Meltham		
	Huddersfield	Date Received:	20/10/2020
	HD9 4AY		
	-	Date Issued:	26/10/2020
	-		
		Issue Number:	1
Contact:	Luke Russell	Changes from previous issue (if a	applicable)
Tel:	01924 481368		
Email:	luke.russell@camirafabrics.com		

SAMPLE IDENTIFICATION

The information is this section is provided by the client and Lancashire Testing Services Ltd assumes no reponsibility or liability for its accuracy.

Sample Name / Reference Additional Names:	Era + Camira Enviroflam 5 -
Batch Ref/Number: Order Number:	D1071 C10381 83A09372
Colour:	-
Fabric Composition:	-
Customer:	-

SPECIFICATION	
BS7176:2007 + A1:2	2011 - Medium Hazard
TEST METHOD	
Flammability:	BS EN 1021-1:2006 Part 1: Ignition source smouldering cigarette
	BS EN 1021-2:2006 Part 2: Ignition source match flame equivalent
	BS 5852:2006 Crib Ignition source 5
Pre-treatment:	BS 5852:2006 Annex E - Water soaking procedure

Conclusion

The composite tested:	Complies	with the flammability requirements of:				
BS 7176:2007 + A1:2011	Medium hazard	, taking into account uncertainty of measurement.				
Uncertainty of Measurement: ±1 second - timing measurements, ±1mm - dimensional measurements						
Comments:						

Please note that copies of this original certificate are not valid



LANCASHIRE TESTING SERVICES LIMITED

Lyon Road Industrial Estate : Kearsley : Bolton Lancashire : BL4 8NB Tel: +44 (0) 1204 792858 Email: enquiries@ltslab.co.uk www.ltslab.co.uk



TEST CERTIFICATE

Test Results:-

BS7176:2007 + A1:2011 - Medium Hazard - Specification for resistance to ignition of upholstered furniture for non-domestic seating by testing composites

"The following test results relate only to the ignitability of the combination of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use."

Sample Code UK2000935 -4											
Sample / Name Reference		Era + Camira Enviroflam 5									
Client			Camira Fabrics								
Date of t	est		26/10/2020								
Pre-Trea	atment		BS 5852:2006 A	nnex E - Wate	er soaking proc	edure					
			Line Dried during day at ambient temperature								
Filling Ty	/pe		Carpenter/RX36110 CMHR polyurethane foam of approximate density 36Kg/m3								
Size of t	est rig		Small: Back - 45	0 x 300 ± 2mr	n + Seat - 450	x 150 ± 2mm					
Test Cor	nditions		Period h	Temperature ⁰C		Relative humidity %	Air Flow m/s	Volume m ³			
Conditio	ning of test sp	pecimens	≥24	23	3±2	50±5	-	-			
Testing	conditions		-	10	-30	15-80	0.02-0.2	≥6			
Testing Source			BS EN 1021-1:20	BS EN 1021-1:2006 Smouldering Cigarette Source							
Testing	time limit		60 minutes after placement of smouldering cigarette.								
Test	Position	Ignition/N	Durat	ion of: (min.s	sec)		nd flaming criteria exceeded: (If any)				
No.		on Ignition	Ignition Source	Flames	Smoke	u u u u u u u u u u u u u u u u u u u					
1	RHS	NI	18.30	-	19.21	-					
2	М	NI	18.51	-	19.41	-					
3	-	-	-	-	-	-					
Testing Source			BS EN 1021-2:2006 Match flame ignition source								
	time limit		2 minutes after re	emoval of bur	ner tube (120 s	econds)					
Test	Position	Ignition/N	Dur	ation of: (se	c)	T					
No.		on Ignition	Ignition Source	Flames	Smoke	_	Smouldering and flaming criteria exceeded: (If any)				
1	LHS	NI	15	15	25	-					
2	М	NI	15	15	26	-					
3	RHS	NI	15	15	26	-					
RESU	LT:	SMOUL	DERING CIGA	RETTE SC	URCE		PA	PASS			
MATCH FLAME IGNITION SOURCE						PASS					
KEY: I =	Ignition, NI =	Non Ignition	n, LHS = Left han	d side, M = Mi	ddle, RHS = R	ight hand side	•				

Issue Number: 1

Please note that copies of this original certificate are not valid



LANCASHIRE TESTING SERVICES LIMITED

Lyon Road Industrial Estate : Kearsley : Bolton Lancashire : BL4 8NB Tel: +44 (0) 1204 792858 Email: enquiries@ltslab.co.uk

www.ltslab.co.uk



TEST CERTIFICATE

Test Results:-

BS7176:2007 + A1:2011 - Medium Hazard - Specification for resistance to ignition of upholstered furniture for non-domestic seating by testing composites

"The following test results relate only to the ignitability of the combination of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use."

Sample Code			UK2000935 -4							
Sample	Reference		Era + Camira Enviroflam 5							
Client			Camira Fabrics							
Date of test 26/10/2020										
Pre-Treatment		BS 5852:2006 Annex E - Water soaking procedure								
			Line Dried during day at ambient temperature							
Filling Type			Carpenter/RX36110 CMHR polyurethane foam of approximate density 36Kg/m3							
Size of te	est rig		Large: Back - 45	e: Back - 450 x 450 ± 2mm + Seat - 450 x 300 ± 2mm						
Test Conditions			Period h	Tempe	erature °C Relative humidity %		Air Flow m/s	Volume m ³		
Conditioning of test specimens		≥24	23	23±2		50±5		-		
Testing conditions			-	1(10-30 15-80		0.02-0.2	≥6		
Testing Source			BS 5852:2006 Crib Ignition source 5							
Testing time limit 10 minutes after ignition of crib. Observed for 60 minutes in total.										
Test	Position	Ignition/N	Duration of:	(min.sec)	Extent of Damage to component: mm					
No.		on	Flames	Smoke		Horizontal		Vertical		
		Ignition			Width	Length	Depth	Width	Depth	
1	М	NI	4.56	8.06	134	106	32	115	35	
2	М	NI	4.04	7.54	123	109	29	115	38	
RESULT: CRIB IG			INITION SOURCE 5 PASS							


Test	Time for: (sec)						
No.	Ignition of test pieces	Cover Splitting	Extinction				
1	-	-	-				
2	-	-	-				

On behalf of Lancashire Testing Services :

Tony Alcock, Laboratory Technician: John Marsh, Laboratory Technician:

Please note that copies of this original certificate are not valid

Issue Number: 1

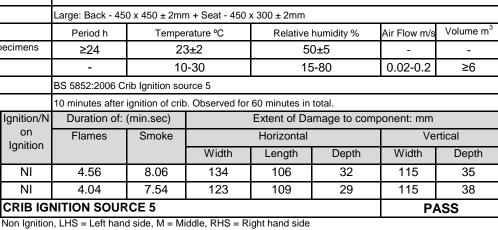

Peter Collings,

Operations Manager:



LANCASHIRE TESTING SERVICES LIMITED Lyon Road Industrial Estate : Kearsley : Bolton Lancashire : BL4 8NB Tel: +44 (0) 1204 792858

Email: enquiries@ltslab.co.uk www.ltslab.co.uk





Certificate Number:

If the measurement result plus/minus the expanded uncertainty with a 95 % coverage probability overlaps the limit, it is not possible to state compliance or non-compliance. The measurement result and the expanded uncertainty with a 95 % coverage probability will then be reported. The report will include the actual value with the uncertainty range.

Lancashire Testing Services Ltd have conducted thorough analysis of the uncertainty of all measurements carried out in the application of the standard or standards detailed in this report. Where possible any associated uncertainty of measurements have been accounted for in the working instructions, so that they have no impact on the reporting of the final result. In instances were uncertainty of measurements can only be taken into account after the test has been conducted, these uncertainty values have been stated on this report. The stated uncertainty of measurement has also been taken into account in the final reporting of the overall result.

Issue Number: 0

Please note that copies of this original certificate are not valid