


Track


camira




Path
HTK03




Roam
HTK05




Carry
HTK13



Discover
HTK11




Drive
HTK02




Footprint
HTK14




Clue
HTK04




Location
HTK09



Way
HTK07



Hunt
HTK12




Passage
HTK15


Photographic fabric scans are not color accurate. Always request actual fabric samples before ordering.



Place
HTK06

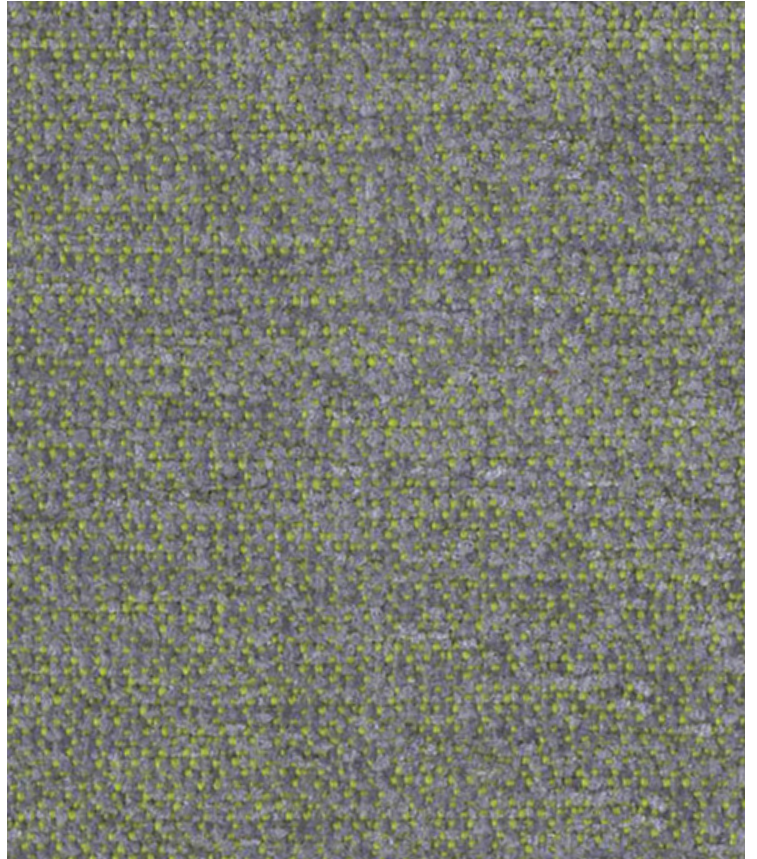


Route
HTK08




Rail
HTK10



Rock
HTK01



Scramble
HTK17



Traverse
HTK18



Rough
HTK16

Transport
seating

Washable



Year guarantee

Track is a luxurious Trevira CS® chenille fabric which can be used for fixed or removable upholstery applications. Soft and relaxed yet still high performing, Track is available in a selection of colorways: classic mono shades and playful contrast colors. Custom colours are also available.

If used as a removable cover, the fabric can be washed up to 140°F.

The slubby look of Track eludes to glitches found in distinctive hand-crafted design. Beauty in irregularity.



Technical information

EN

Composition

100% Trevira CS® Flame Retardant Polyester

Width

54 inches minimum

Weight

16^{1/4} oz/sq yd ±5% (24^{1/2} oz/running yd ±5%)

Abrasion Resistance*

ASTM D4157 Wyzenbeek method, Heavy Duty Upholstery
Independently certified to ≥80,000 double rubs
Covered by a full and comprehensive 5 year guarantee
(full details available)

Flammability

FMVSS 302
NFPA 130
IMO FTP Code (Part 8)

Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards.

Color Fastness to Light

AATCC-16 (40 hours) Class 4

Fastness to Crocking

AATCC-8 (Dry: 4, Wet: 3)

Shampoo

4 (BS 1006 UK-TB)

Maintenance

Vacuum regularly. Wipe clean with a damp cloth or shampoo using proprietary upholstery shampoo.
Removable covers: Washable to 140°F.

Color Matching

Batch to batch variations in shade may occur within commercial tolerances.

The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

F

Composition

100% Trevira CS® Schwerentflammbares Polyester

Largeur

54 pouces minimum

Poids

16^{1/4} oz/sq yd ±5% (24^{1/2} oz/yd.lin ±5%)

Résistance à l'abrasion*

ASTM D4157 Wyzenbeek method, Heavy Duty Upholstery
Certificat indépendant ≥80,000 double frottement
Avec une garantie totale de durabilité de 5 ans
(renseignements complémentaires disponibles)

Flammabilité

FMVSS 302
NFPA 130
IMO FTP Code (Part 8)

Notez: La performance de flammabilité dépend des composantes utilisées. Nos certificats indiquent les substrats utilisés dans nos tests. Pour les tests composites, les clients doivent s'assurer que leurs meubles complets satisfont aux normes nécessaires.

Solidité à la Lumière

AATCC-16 (40 heures) Class 4

Solidité à la Crocking

AATCC-8 (Sec: 4, Mouillé: 3)

Shampooing

4 (BS 1006 UK-TB)

Nettoyage

Aspirer régulièrement. Essuyer avec une étoffe humide ou nettoyer à l'aide d'un produit approprié pour tissus d'ameublement. Revêtements détachables: Lavable jusqu'à 140°F.

Standardisation des coloris

Variations de coloris d'un bain à un autre peuvent se manifester.

The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

ES

Composición

100% Trevira CS® Polyester retardateur de flamme

Ancho

54 pulgadas mínimo

Peso

16^{1/4} oz/sq yd ±5% (24^{1/2} oz/lin.y ±5%)

Resistencia a la abrasión*

ASTM D4157 Wyzenbeek method, Heavy Duty Upholstery
independientemente del certificado de ≥80,000
rozamiento doble
Con garantía total de uso 5 años
(más información disponible bajo consulta)

Inflamabilidad

FMVSS 302
NFPA 130
IMO FTP Code (Part 8)

Nota: El rendimiento de la inflamabilidad depende de los componentes usados. Nuestros certificados muestran qué substratos se han usado en nuestros tests. Para tests compuestos nuestros clientes deben asegurar si sus muebles cumplen la normativa al uso.

Solidez a la Luz

AATCC-16 (40 horas) Class 4

Solidez al Rozamiento

AATCC-8 (Seco: 4, Húmedo: 3)

Champú

4 (BS 1006 UK-TB)

Limpeza

Aspirar regularmente. Limpie con un paño húmedo o champú usando un champú para tapicería patentado.
Funda desenfundable: Lavable hasta 140°F.

Continuidad de colores

Cada tintada puede tener pequeñas variaciones en el tono dentro de las tolerancias comerciales aceptadas.

The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.