


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client :	Camira Grou Suite 304/19 Malvern VIC	Milton Parade	Test Number : Issue Date : Print Date : Order Number:	17-00165 28/04/201 28/04/201 IMO652.16	7
Sample Description IMO Resolution A.652(16) 19 October 1989 Section 8.2 (Modified)		Clients Ref : "Intervene" Flat woven fabric Colour : HYW148/Texture End Use : Seating Nominal Composition : 100% Polyester with TriOnyx b Nominal Mass per Unit Area/Density : 510g/m2 Nominal Thickness : 1mm Recommendation of Fire Test Procedures for Upholster Cigarette Test		uldering	
		Test Conditions Temperature		22	°C
		Relative Humidity Did Ignition Occur		49 No	%

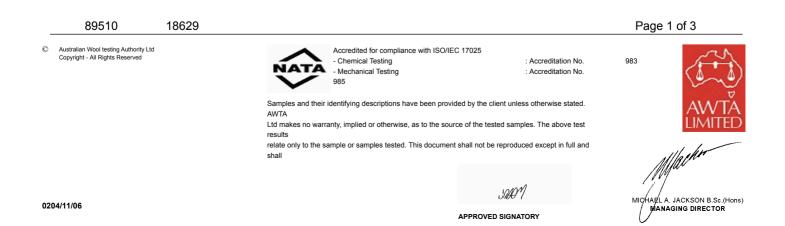



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031

P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

## **TEST REPORT**

Client :	Camira Group Pty Ltd Suite 304/19 Milton Parade Malvern VIC 3144	Test Number : Issue Date : Print Date : Order Number:	Issue Date : 28/04/2017   Print Date : 28/04/2017		
	Extent of Damage	Vertical	Horizontal		
	Length	6	2	mm	
	Width	4	2	mm	
	Depth	0	0	mm	
	Ignition Source Time		4.0	min	
	Smouldering Time		0	min	
	Assembly Smouldering when Dismantled		No		
	Test Assembly Self Extinguished		Yes		
	Flame Time		0	min	

JPS Superkings - Gold cigarettes used with a smouldering rate of 12±3 minutes over 40mm. Note: Cigarettes failed to smoulder complete length.

89510

18629



AWTA

results

shall


Accredited for compliance with ISO/IEC 17025 - Chemical Testing - Mechanical Testing

Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test

relate only to the sample or samples tested. This document shall not be reproduced except in full and

: Accreditation No : Accreditation No Page 2 of 3

983





SADM





APPROVED SIGNATORY




Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031

P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

		TEST REPO	ORT							
Client :	Camira (	Group Pty Ltd	Test Number :	17-00165	7					
	Suite 304	4/19 Milton Parade	Issue Date :	28/04/201	28/04/2017					
	Malvern	VIC 3144 Print Date :			28/04/2017					
			Order Number :	IMO652.16	652.16					
IMO Resoluti A.652(16) 19 October 1 Section 8.3		Recommendation of Fire Test Procedure for Upholstered Furniture - Flame Test								
		Test Conditions								
		Temperature		22	°C					
		Relative Humidity		49	%					
		Did Flaming Ignition Occur?		No						
		Extent of Damage	Vertical	Horizontal						
		Length	12	8	mm					
		Width	15	10	mm					
		Depth	2	2	mm					
		Time for Burning to reach Rig Extremities		0	min					
		Test Assembly Self Extinguished		Yes						
		Assembly Smouldering when Dismantled		No						

Modification: Propane/Butane mixture used as ignition source.

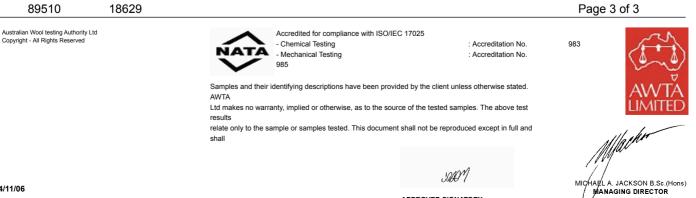

C

APPROVED SIGNATORY